


SVM 4/100 E

Oberholm-Option Head Beam Option

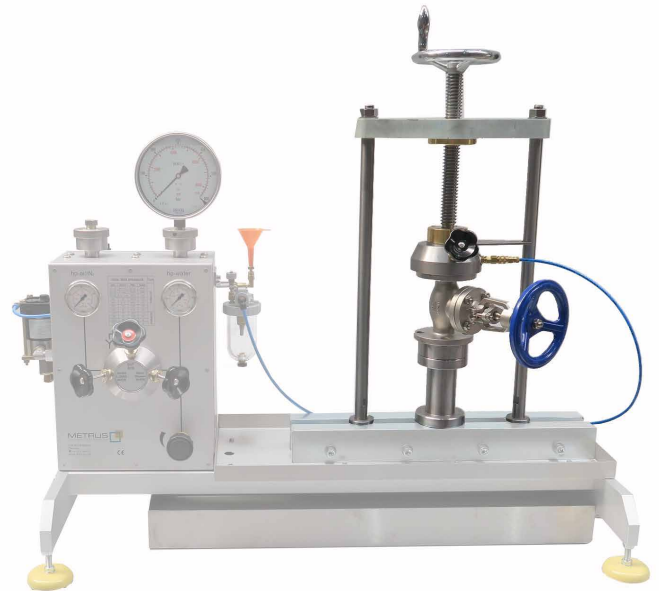

Datenblatt

Mobiler Oberholm zur Prüfung von Absperr- und Regelarmaturen

Grundausrüstung

- Spannungsbereich: DN10-DN100 3/8"-4"
- Spannkraft: 4 to
- Aufspannung: Manuelles Schnellspannsystem mit Handrad
- Prüfmedium: Gas/Luft (externe Versorgung) (Wasserprüfung optional)
- Drucksystem: PN600
- Zuganker und Dichtplatten aus Edelstahl
- Montage und Demontage in wenigen Minuten
- Schnellkupplung für Blasenähler
- METRUS Präzisionsventiltechnik am oberen Dichtkopf
- Bis DN100/4" auch auf SVM 4/250 verwendbar

Specifications


Mobile Head Beam for Shutt-off and Control Valves

Basic features


- Clamping range: DN10-DN100 3/8"-4"
- Clamping force: 4 to
- Way of clamping: Manual fast clamping system with hand wheel
- Test fluid: Gas/air (external supply) (Water test optional)
- Pressure piping: PN600
- Stainless steel tie rod and sealing plate
- Mounting and dismantling in a few minutes
- Quick coupling for bubble counter
- METRUS High precision valves at the upper sealing head
- Also usable for SVM 4/250 up to DN100/4"



Oberholm-Option Vorderansicht
Head Beam option front view

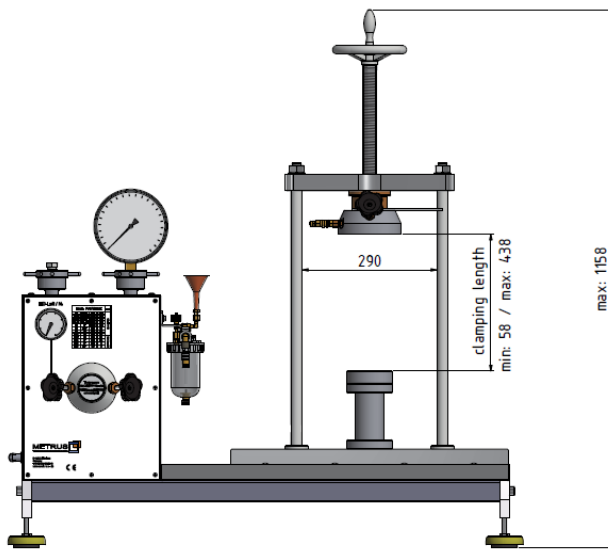

Oberholm-Option Draufsicht
Head Beam option top view

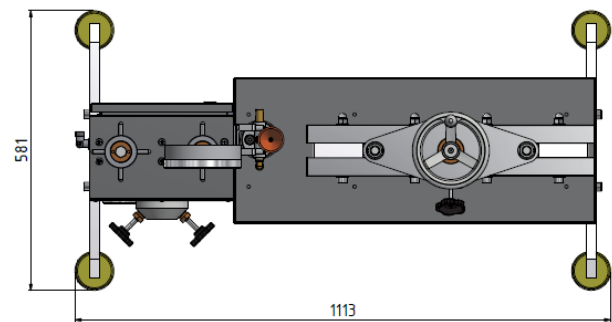

Prüfdrucktabelle Test Pressure Table

Flansch Flange		Max. Prüfdruck [bar] Max. test pressure [bar]			
[mm]	[inch]	SVM 4/100		SVM 4/250	
		BAR	PSI	BAR	PSI
DN 10-15	3/8" - 1/2"	600	8700	600	8700
DN 20-25	3/4" - 1"	380	5500	380	5500
DN 32-40	1 1/4" - 1 1/2"	185	2600	185	2600
DN 50	2"	100	1400	100	1400
DN 65	2 1/2"	65	940	65	940
DN 80	3"	50	720	50	720
DN 100	4"	30	430	30	430